

Material:

\* Insulation: Nylon 66 UL 94V-2  
Color Nature

\* Contact: Brass

Circuits	Dimension	
	A	B
2	2.50(.098)	5.0(.197)
3	5.00(.197)	7.5(.295)
4	7.50(.295)	10.0(.394)
5	10.00(.394)	12.5(.492)
6	12.50(.492)	15.0(.591)
7	15.00(.591)	17.5(.689)
8	17.50(.689)	20.0(.787)
9	20.00(.787)	22.5(.886)
10	22.50(.886)	25.0(.984)
11	25.00(.984)	27.5(1.083)
12	27.50(1.083)	30.0(1.181)
13	30.00(1.181)	32.5(1.280)
14	32.50(1.280)	35.0(1.378)
15	35.00(1.378)	37.5(1.476)
16	37.50(1.476)	40.0(1.575)
17	40.00(1.575)	42.5(1.673)
18	42.50(1.673)	45.0(1.772)
19	45.00(1.772)	47.5(1.870)
20	47.50(1.870)	50.0(1.969)

2 THROUGH 5  
CIRCUITS

6 THROUGH 20  
CIRCUITS






Recommended P.C. Board Layout

4					DATE	UNT: mm / inch	TITLE: 2.50MM(.098") RIGHT ANGLE HEADERS		
3				DRAWN BY: <i>Sandy</i>	12-12-95	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:		
2				ENGINEER: <i>David</i>	12-12-95	.X ± 0.30 / .012    .X' ± 1"	DRAWING NO. <b>CI2303SA</b> PART NO. <b>CI23**P1H00</b>		
1				CHECKED BY: <i>Alex</i>	12-13-95	.XX ± 0.20 / .008    .X' ±			FINISH:
SYM	NAME	DATE		APPROVED BY: <i>Alex</i>	12-13-95	.XXX ± 0.10 / .004    .XX' ±			
REVISIONS						SHEET 1 OF 1			

Material:


\* Insulation: Nylon 66 UL 94V-2  
Color Nature

\* Contact Plating: Gold flash plated over  
1.27 $\mu$ m(50 $\mu$ ) Nickel

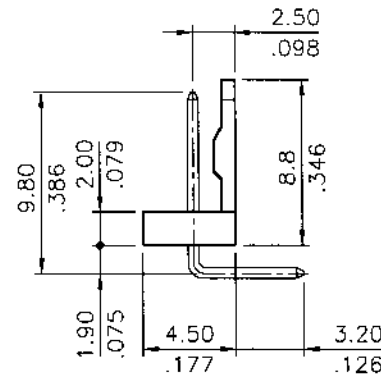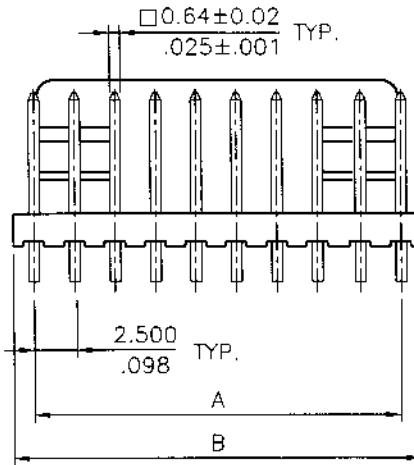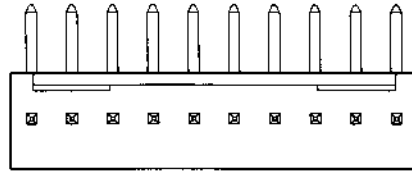

2 THROUGH 5  
CIRCUITS

6 THROUGH 20  
CIRCUITS




Recommended P.C. Board Layout


Circuits	Dimension	
	A	B
2	2.50(.098)	5.0(.197)
3	5.00(.197)	7.5(.295)
4	7.50(.295)	10.0(.394)
5	10.00(.394)	12.5(.492)
6	12.50(.492)	15.0(.591)
7	15.00(.591)	17.5(.689)
8	17.50(.689)	20.0(.787)
9	20.00(.787)	22.5(.886)
10	22.50(.886)	25.0(.984)
11	25.00(.984)	27.5(1.083)
12	27.50(1.083)	30.0(1.181)
13	30.00(1.181)	32.5(1.280)
14	32.50(1.280)	35.0(1.378)
15	35.00(1.378)	37.5(1.476)
16	37.50(1.476)	40.0(1.575)
17	40.00(1.575)	42.5(1.673)
18	42.50(1.673)	45.0(1.772)
19	45.00(1.772)	47.5(1.870)
20	47.50(1.870)	50.0(1.969)


4				DATE	UNIT: mm / inch	TITLE: 2.50MM(.098") RIGHT ANGLE HEADERS	 瀚荃股份有限公司 CviLux Corporation
3		DRAWN BY: Kevin 10/25/99		DATE	UNIT: mm / inch	TITLE: 2.50MM(.098") RIGHT ANGLE HEADERS	
2		ENGINEER: Sandy 10/25/99		DATE	UNIT: mm / inch	TITLE: 2.50MM(.098") RIGHT ANGLE HEADERS	
1		CHECKED BY: [Signature] 10/25/99		DATE	UNIT: mm / inch	TITLE: 2.50MM(.098") RIGHT ANGLE HEADERS	MATERIAL:
SYM	NAME	DATE		REVISIONS	APPROVED BY: [Signature] 10/25/99	UNIT: mm / inch	TITLE: 2.50MM(.098") RIGHT ANGLE HEADERS
					TOLERANCE UNLESS OTHERWISE SPECIFIED		
					.X ± 0.30/.012	.X' ± 1"	
					.XX ± 0.20/.008	.X' ±	
					.XXX ± 0.10/.004	.XX' ±	
						FINISH:	DRAWING NO. C12305SA
							PART NO. C123**P2H00
						SCALE 2 / 1	SHEET 1 OF 1

\* Material: Nylon 66 UL 94V-2  
Color Nature

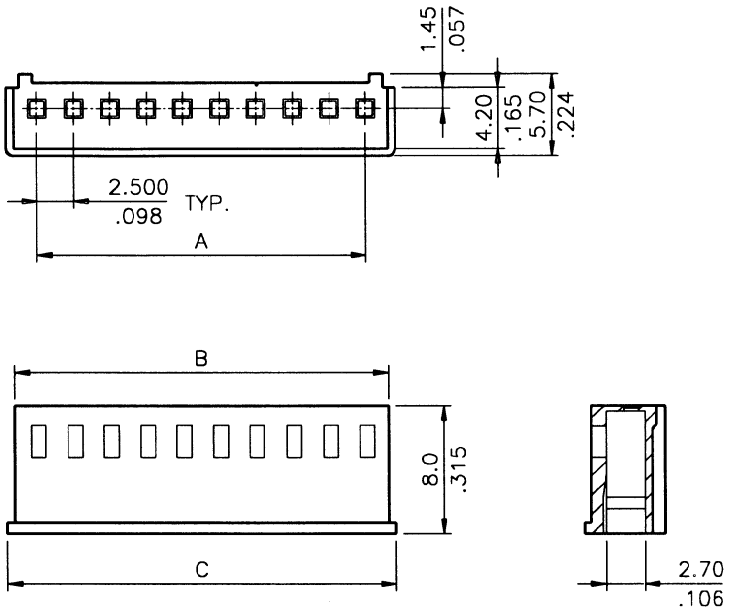

Circuits	Dimension		
	A	B	C
2	2.50(.098)	6.0(.236)	7.20(.283)
3	5.00(.197)	8.5(.335)	9.70(.382)
4	7.50(.295)	11.0(.433)	12.20(.480)
5	10.00(.394)	13.5(.531)	14.70(.579)
6	12.50(.492)	16.0(.630)	17.20(.677)
7	15.00(.591)	18.5(.728)	19.70(.776)
8	17.50(.689)	21.0(.827)	22.20(.874)
9	20.00(.787)	23.5(.925)	24.70(.972)
10	22.50(.886)	26.0(1.024)	27.20(1.071)
11	25.00(.984)	28.5(1.122)	29.70(1.169)
12	27.50(1.083)	31.0(1.220)	32.20(1.268)
13	30.00(1.181)	33.5(1.319)	34.70(1.366)
14	32.50(1.280)	36.0(1.417)	37.20(1.465)
15	35.00(1.378)	38.5(1.516)	39.70(1.563)
16	37.50(1.476)	41.0(1.614)	42.20(1.661)
17	40.00(1.575)	43.5(1.713)	44.70(1.760)
18	42.50(1.673)	46.0(1.811)	47.20(1.858)
19	45.00(1.772)	48.5(1.909)	49.70(1.957)
20	47.50(1.870)	51.0(2.008)	52.20(2.055)



4				DATE	UNIT: mm / inch	TITLE: 2.50MM(.098")	 瀚荃股份有限公司 Cvilux Corporation
3				DRAWN BY: <i>Landy</i> 12-12-95	TOLERANCE UNLESS OTHERWISE SPECIFIED	CRIMP TERMINAL HOUSING	
2				ENGINEER: <i>David</i> 12-12-95	X ± 0.30 / .012 X' ± 1"	MATERIAL:	DRAWING NO. C12301SA
1				CHECKED BY: <i>Alex</i> 12-13-95	.XX ± 0.20 / .008 .X ±	FINISH:	PART NO. C123**S0000
SYM	NAME	DATE	REVISIONS	APPROVED BY: <i>Alex</i> 12-13-95	.XXX ± 0.10 / .004 .XX ±		SCALE 2 / 1
							SHEET 1 OF 1

